


# ATTIC ACCESS DOOR

**Model 22x30 - R42! - Quick & Easy Install**

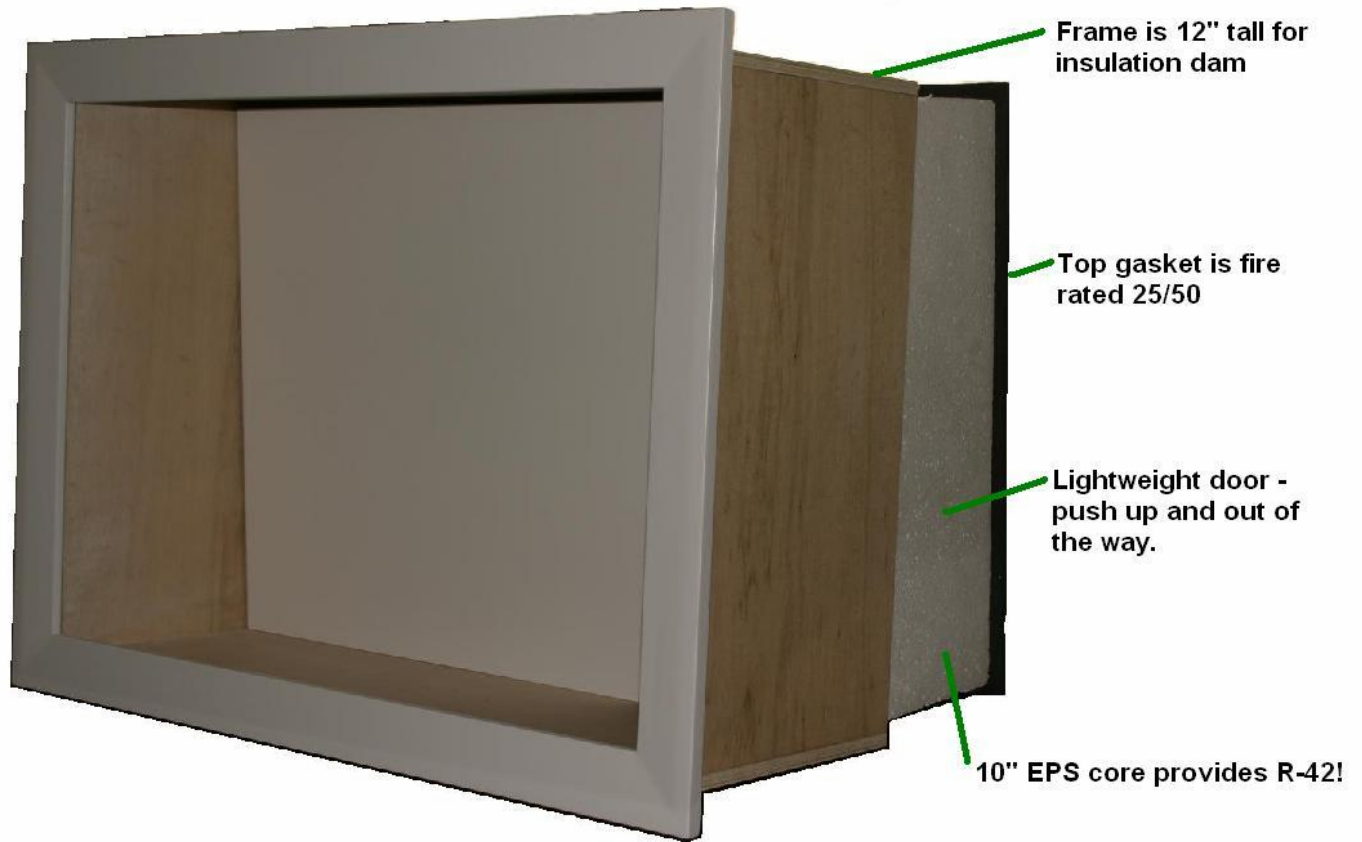

- \* Gloss white pre-finished door face and wood trim
- \* Wood frame fits between 24" o.c. trusses or 16" o.c. joists (with minimal carpentry)
- \* Triple-sealed door provides air tight seal
- \* Meets ENERGY STAR Thermal Bypass requirements

## ENERGY STAR Qualified Homes Thermal Bypass Inspection Checklist

Home Address: _____		City: _____		State: _____		
Thermal Bypass	Inspection Guidelines	Corrections Needed	Builder Verified	Rater Verified	N/A	
5. Attic/ Ceiling Interface	<b>Requirements:</b>					
	• All attic penetrations and dropped ceilings include a full interior air barrier aligned with insulation with any gaps fully sealed with caulk, foam or tape					
	• Movable insulation and fits snug in opening and air barrier is fully gasketed					
	5.1 Attic Access Panel (fully gasketed and insulated)	<input type="checkbox"/>	<b>X</b>	<b>X</b>	<input type="checkbox"/>	
	5.2 Attic Drop-down Stair (fully gasketed and insulated)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	5.3 Dropped Ceiling/Soffit (full air barrier aligned with insulation)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	5.4 Recessed Lighting Fixtures (ICAT labeled and sealed to drywall)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	5.5 Whole-house Fan (insulated cover gasketed to the opening)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	